

# IC28 - Undercounter Ice Machine - 28kg / 24hr



RAINBOW  
TECHNOLOGY



USB



PROGRAMMED  
OZONE CYCLE



SCHEDULED  
PRODUCTION



TOUCH  
CONTROL



BLUETOOTH



WI-FI



SAFEICE



## Features

- Steel casing
- Air and water condensation
- Sanitisation cycle
- Programmable ice production
- Capacitive control key
- Audible and light signaling alarms
- HACCP alarm report
- External cube weight adjustment
- Storage ice level adjustment
- USB connection for software update and HACCP data download
- Condenser fan controlled at low ambient temperatures
- Predictive failure analysis
- Equipment performance report

## Optional


- Sanitisation cycle programmable with ozone
- Nanotechnological evaporator treatment with Rainbow Technology
- IoT cloud connection
- Feet kit 100mm

## Specifications

<b>Machine</b>	340 x 480 x 600 (L x W x H (mm))
<b>Shipping</b>	460 x 600 x 850 (L x W x H (mm))
<b>Voltage</b>	220-240/50/1 220/60/1
<b>Gas</b>	R290 GWP 3

## Ice Types

Shape	Deposit	Pcs	Weight
Cube	6,5 Kg	18	20KG
20 g	325 Pcs		
-28/28+			
35x32x37mm			



## Technical Data



Cond.



Comp.



WABS. W



Fuse



Kwh/100Kg



I / h



Kg



Kg

C28A AG220-240/50/1N



653

300

10

32.5

2.3

29

33



01869 247 947





www.icecoolserVICING.co.uk



Unit 5 Copse Business Centre, Bulls Copse Road, Hounslow  
Business Park, Totton, Southampton, SO40 9LR

### Dimensions

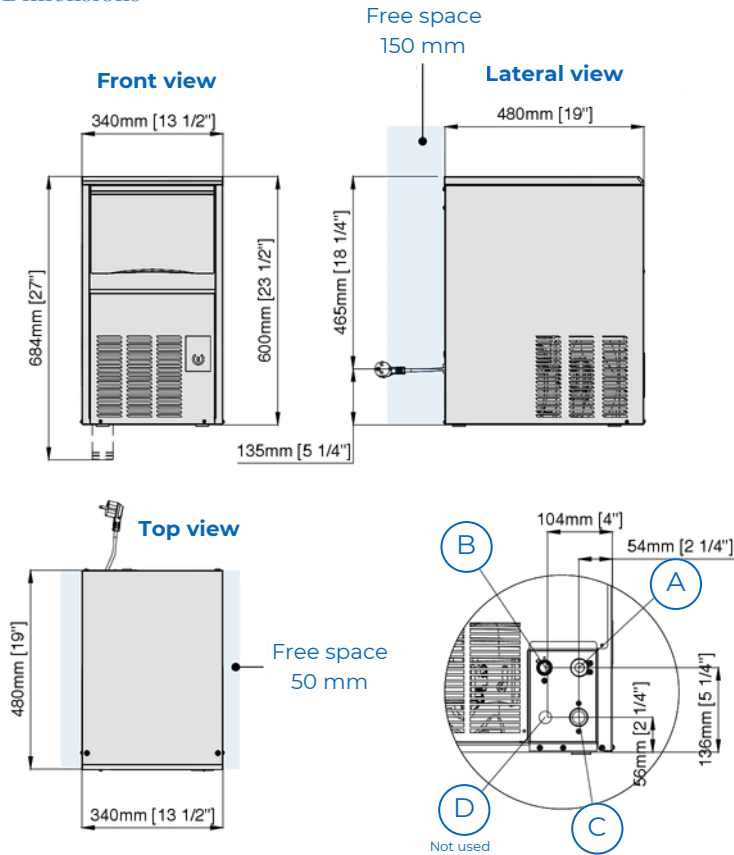

-  Electrical supply cable
-  Water outlet connection Ø 20mm (drain)
-  Water inlet connection 3/4 "G
-  UK 3 pin plug
-  Kit 4 Feet  
50mm H100-120mm (optional)

### Ice Production

Air cooled unit 

**Air Temp.**

**Water Temp.**

°C / °F	10° 50°	15° 59°	21° 70°	32° 90°
10°	28	26	24	20
50°	62	57	53	44
21°	25	23	22	18
70°	55	57	48	40
32°	22	20	19	15
90°	48	44	42	33
38°	18	17	16	13
100°	40	37	35	29

### MyICE

Allow control and monitoring of ice makers directly from smartphone.



### Touch Control

Capacitive Stand-by / Start button (LED continuously changing colors from white to red)



**Heat Expelled** 937 W

**Air Volume** 200 m<sup>3</sup>/h

### Operating Conditions

<b>Temp. Ambient</b>	Min 10°C	Max 40°C
<b>Temp. Water Ice</b>	5°	35°
<b>Press. Water</b>	1 Bar (14psi)	10 Bar (140psi)
<b>Conducib. Water</b>	20 microS	500 microS
<b>Power Supply</b>	-10%	+10%

